



A	23-10-19	KÆ 15426: Updated with colors	ML
#	Date	Revision	Name
This Document contains proprietary data of Actulux A/S. No information, reproduction or use of any part there of may be used without written permission.			
Tolerances unless otherwise specified: ISO 2768-mL. Distance between holes +/- 0.2mm and diameters +/- 0.1mm. Ri = 1mm for bending ISO 13920-BH for welding processes		Actulux A/S Haandvaerkervej 2 DK 9560 Hadsund Denmark	Phone int.: +45 98 57 40 90 Fax int.: +45 96 15 28 00 e-mail: info@actulux.com www.actulux.com
SURFACE TREATMENT/FINISH:		MATERIAL:	SIZE: A3 SHEET: 1 OF 2 SCALE: 1:1
WEIGHT: 0,052 KG.		TITLE: Diagram for comf. switch	DWG NO.: 111975
DRAWN BY: ML		DATE: 15-10-18	REV: A

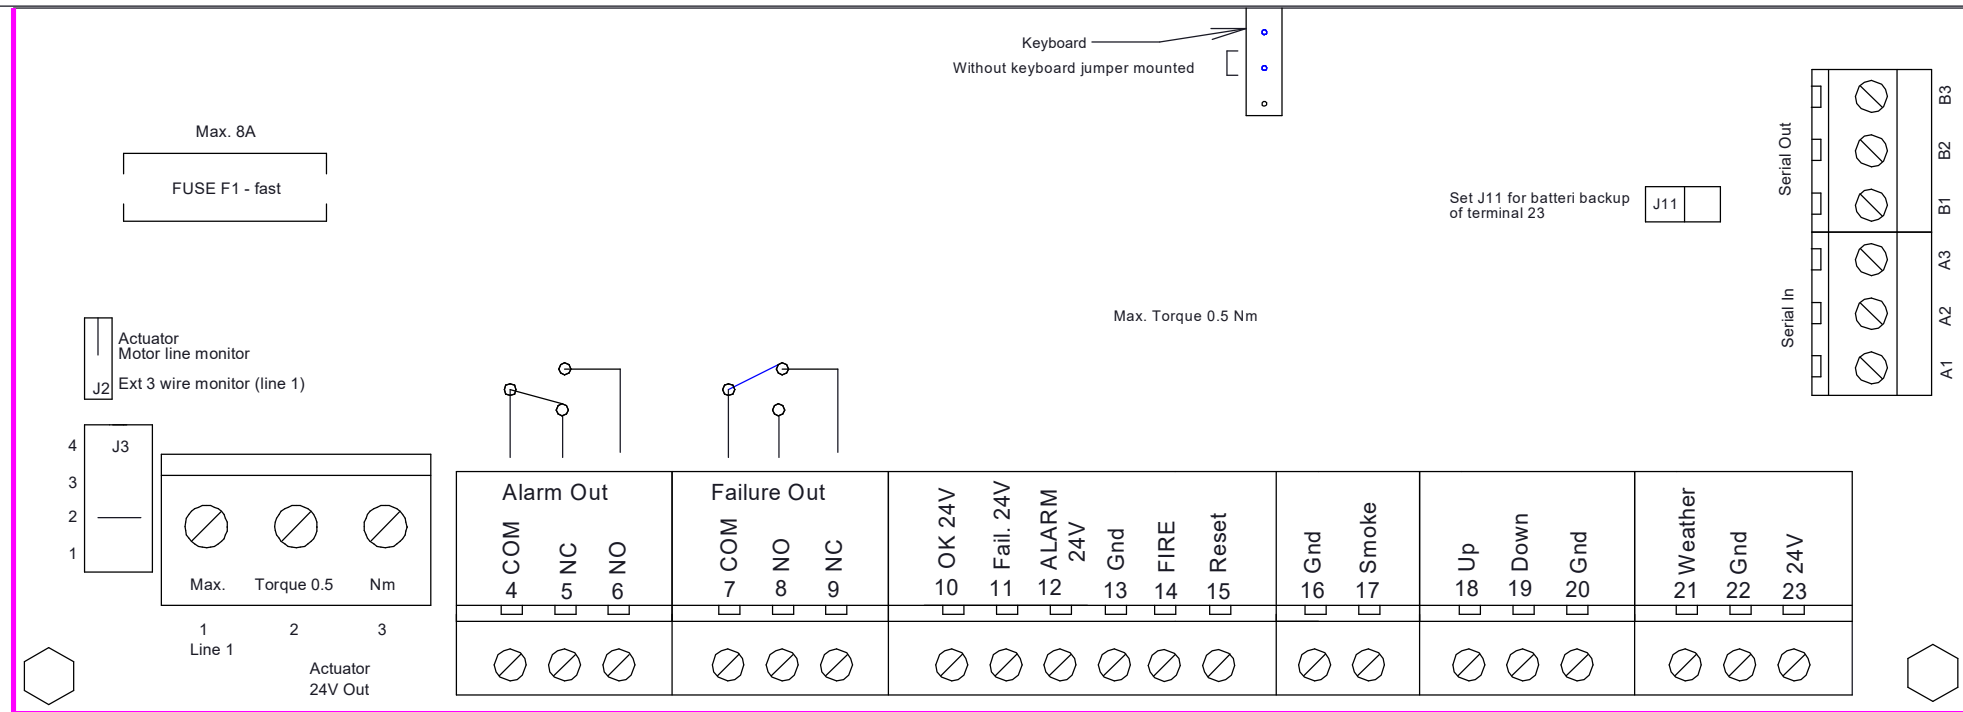


→ Connection to next unit.
← Connection from prev. unit.
Bus connection for serial connection up to 35 pcs. control units.

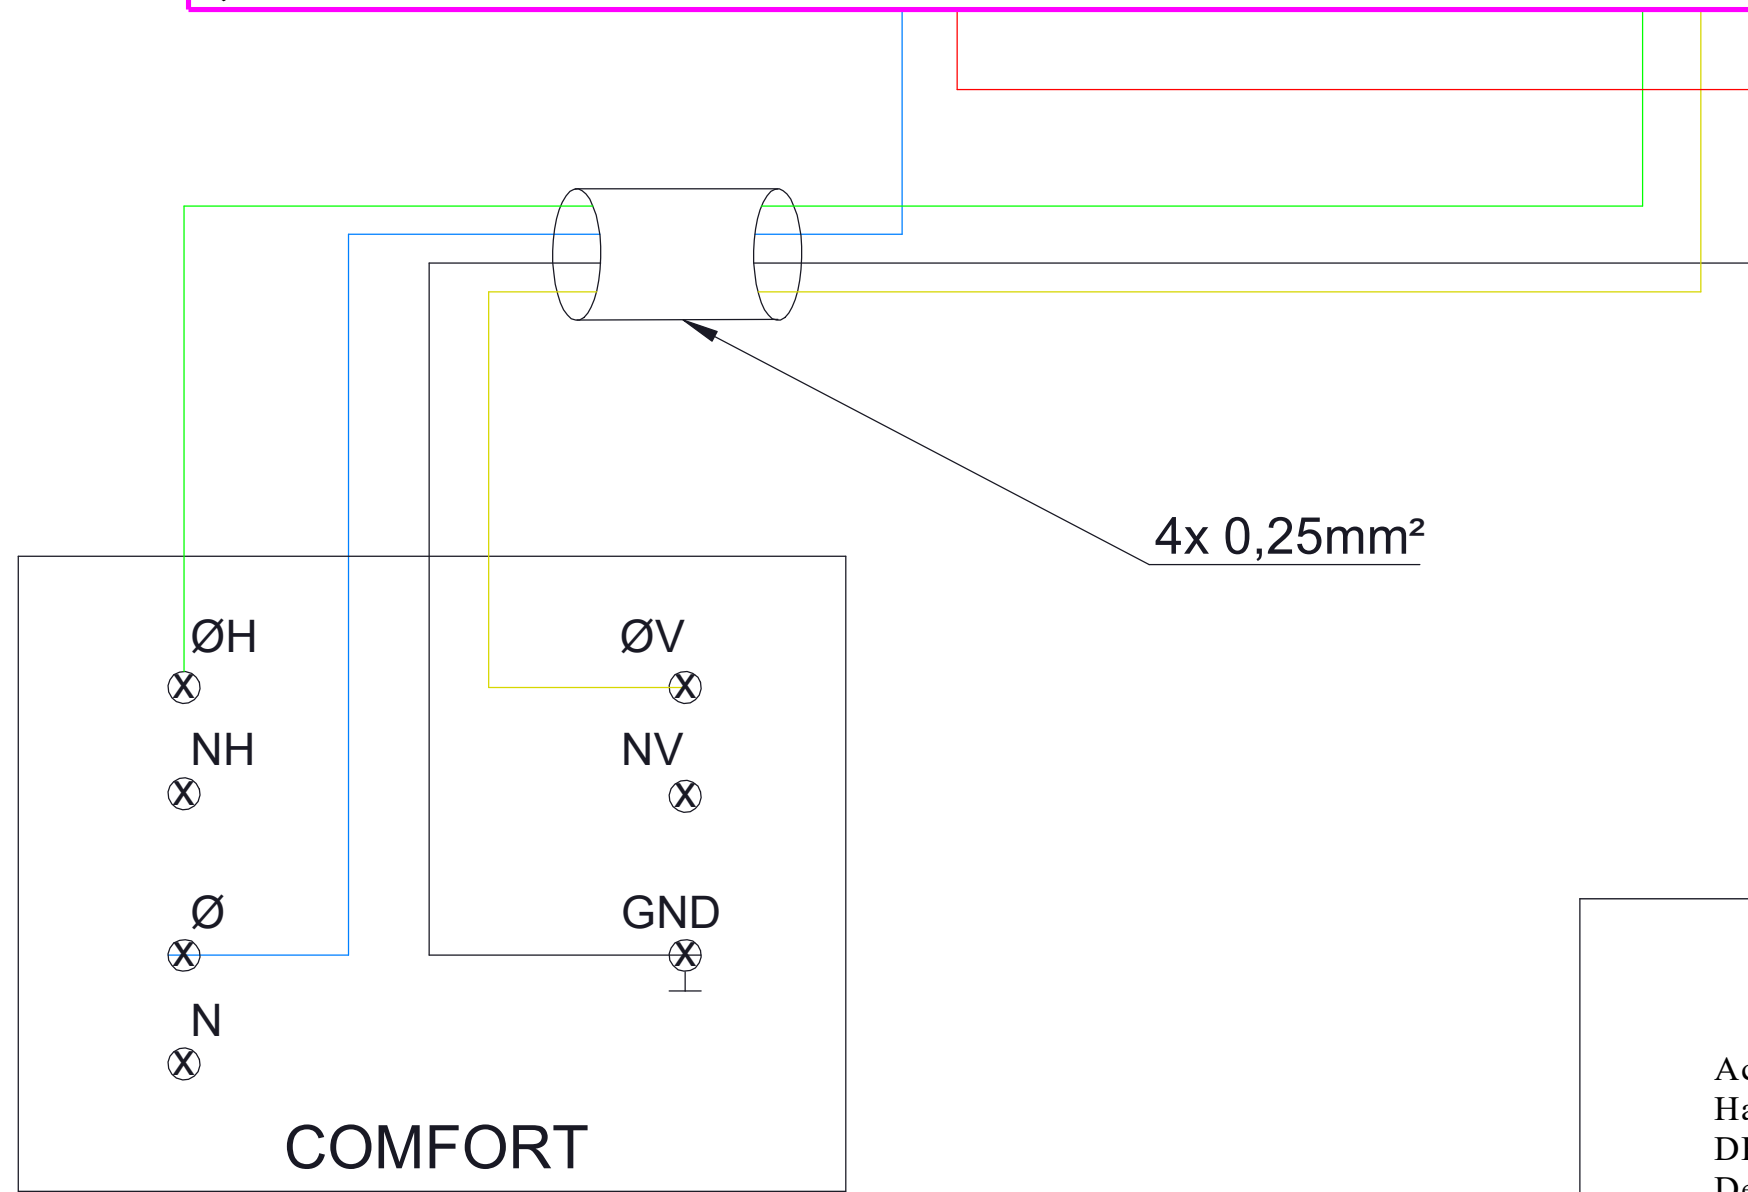

Remember to set DIP5 in SVM

#111943



Actulux

Actulux A/S
Haandvaerkevej 2
DK 9560 Hadsund
Denmark

Phone int.: +45 98 57 40 90
Fax int.: +45 96 15 28 00
e-mail: info@actulux.com
www.actulux.com

DRAWN BY: ML	DATE: 15-10-18	SIZE: A4	SHEET: 2 OF 2	SCALE: 1:1
TITLE: Diagram for comf. switch		DWG NO.: 111975		REV: A